

MODEL PGR-1

PILOT OPERATED PRESSURE REDUCING REGULATOR

FEATURES

Versatile:	Four basic materials and multiple trim material combinations to select from.
Tight Shutoff:	Multiple composition materials provide Class IV and VI inboard leakage rates. Designed as a soft-seated valve.
Capacity:	Highest in the industry. Allows smaller body sizes than competitors in a majority of applications.
Droop:	Highly accurate outlet pressure control, due to absence of range spring in main valve design; provides almost zero "droop effect".
Trim Design:	<u>FTO - pressure balanced trim results in unmatched sensitivity and stability.</u> Internals are <u>cage-contained</u> within easily removable <u>quick change trim</u> .
Heavy-Duty Guiding:	Both top and bottom guided to maintain stability and increased diaphragm life.
Failure Position:	<u>Fails closed on loss of loading pressure.</u> Fails open on loss of P_1 or P_2 pressures with loading pressure yet applied.
Remote Venting:	Spring Chambers on the pilot and teh stabilizer include FNPT connection for remote venting of hazardous or explosive gaseous service.

APPLICATIONS

Model PGR-1 is high performance, pressure loaded diaphragm-type, flow-to-open pressure reducing regulator. Design includes an internal pressure balancing piston-cylinder that provides high flow capacity. The internal trim design allows the same basic unit to cover a broad range of pressure settings. Performance meets or exceeds that of competitive pressure loaded or pilot-operated designs. The PGR-1 regulator is applied primarily in clean natural gaseous service and fuel gas - sweet or sour.

⚠ CAUTION

IN THE EVENT OF DIAPHRAGM FAILURE, THE PROCESS FLUID WILL VENT TO ATMOSPHERE.

USE FNPT TAPS LOCATED ON SPRING CHAMBERS OF THE PILOT AND STABILIZER FOR REMOTE VENTING. PRIMARILY USED WHEN HANDLING HAZARDOUS OR FLAMMABLE FLUIDS.



MODEL PGR-1



LINE SIZES AVAILABLE

1" (DN25), 1-1/2" (DN40), 2" (DN50),
3" (DN80), 4" (DN100)



END CONNECTIONS

NPT, FLANGED



COMMON APPLICATIONS

CLEAN NATURAL GASEOUS SERVICE,
FUEL GAS - SWEET OR SOUR



DESIGN PRESSURE

INLET: 10-400 psig (0.68-27.6 Barg)
OUTLET: 2.0" WC-200 psig (13.8 Barg)

STANDARD / GENERAL SPECIFICATIONS

Body / Cover Dome Materials

DI/DI, CS/CS, SST/SST
 DI = Ductile Iron CS = Carbon Steel
 SST = Stainless Steel

Body Sizes

1", 1-1/2", 2", 3", 4" NPS (DN25, 40, 50, 80, 100)

End Connections

Female NPT (screwed) 1", 1-1/2, & 2" sizes only.
ASME Flanged: 125#, 250# 3" & 4"sizes only.
 - 150#, 300#, 600# all sizes.

Max. Useable Cv

See Table DAG-6 for Wide Open Cv Limits.
METRIC CONVERSION FACTOR: $C_v / 1.16 = k_v$

Body Size		Cv	Body Size		Cv
in	(DN)		in	(DN)	
1"	(25)	13.5	3"	(80)	108
1-1/2"	(40)	27	4"	(100)	198
2"	(50)	54			

Inlet Pressure Range

Operating: 10–400 psig (0.68 – 27.6 Barg).
 See Tables DAG-1A thru -1F for design P vs. T limits.
NOTE: Maximum allowable inlet pressure of the Pilot in the loading system is 250 psig. (17.2 barg).

Outlet Pressure Range

2.0" WC – 200 psig (13.8 Barg)

Max Pressure Drop

Spring Range	Max Drop (psig)
2" - 41" wc	50
1 - 10 psig	200
7 - 200 psig	393
For applications that exceed max drop, install a pressure regulator upstream to reduce the inlet pressure of the PGR-1.	

Min Pressure Drop

5.0 psid (.34 Bard)

Temperature Range

-70° to +250°F (-57° to +121° C)
 Limited by body/cover dome/diaphragm material combinations, and by elastomeric seat, static seal, dynamic seal – materials. See Table 2, Tables DAG-1A through -1F and Table DAG-5.

Inboard Leakage Rates

See Table DAG-10

Optional Constructions

Opt-21: Coalescing Filter Opt-85: Extra Set Pressure
Opt-25S: SST vent screen Taps
Opt-30: Flanged End Conns. Opt-86: System Supply
Opt-40: NACE Constr. Gauge
Opt-55: Oxygen Cleaned
Opt-56: Special Cleaned

Pilot Body / Spring Chamber Materials

DI/DI, LCC/LCC, SST/SST

Pilot Body Size / End Connections

1/4" - NPT (DN6)

Stabilizing Regulator - SST body, 1/4" size, NPT connections, SST spring chamber with 1/8" FNPT vent connection, SST trim, Composition seat and diaphragm - (Buna-N for Non-NACE service; EPDM for NACE service.) (FKM and Expand PTFE for Oxygen Service.)

Tubing & Fittings

Brass fittings with copper tubing or SST fittings with SST tubing. **External sensing is standard:** end user to connect tubing from sensing port on pilot to location in downstream piping. **Self contained sensing is optional:** factory supplied tubing from sensing port on pilot to outlet of the main regulator.

ABBREVIATIONS

BC = Neoprene	NBR = Buna-N	V-TFE = Virgin TFE	EPDM = Ethylene Propylene
---------------	--------------	--------------------	---------------------------

MATERIAL SPECIFICATIONS

Body

DI – ASTM A395
CS – ASTM A216, Grade WCB.
Alternate – ASTM A352 Grade LCC
SST – ASTM A351, Grade CF3M.
 See DAG-1A through DAG-1F for material specs.

Cover Dome

DI – ASTM A395
CS – ASTM A216, Grade WCB.
Alternate – ASTM A352 Grade LCC
SST – ASTM A351, Grade CF3M

Metallic Trim

Plug, Cage, Piston: 316L SST. See Table 1.

Diaphragm *

Elastomeric – BC, NBR, EPDM, FK, FKM, 3-Ply

Seat *

BC, NBR, V-TFE

Static Seals (See Fig. DAG-F1) *

V-TFE

Dynamic Seals (See Fig. DAG-F1) *


Type OR - BC, NBR, EPDM, FKM o-ring seal.
Type UC– V-TFE u-cup seal w/ Elgiloy energizer
 V-TFE u-cup seal w/ 316L SST energizer

Painting

Standard: All non-corrosion resistant portions to be painted with corrosion resistant epoxy paint per Cashco Spec #S-1606.

* See Product Coder for possible Trim combinations.

† Monei™, is registered trade name:
 Monei™ is a mark owned by International Nickel Co.

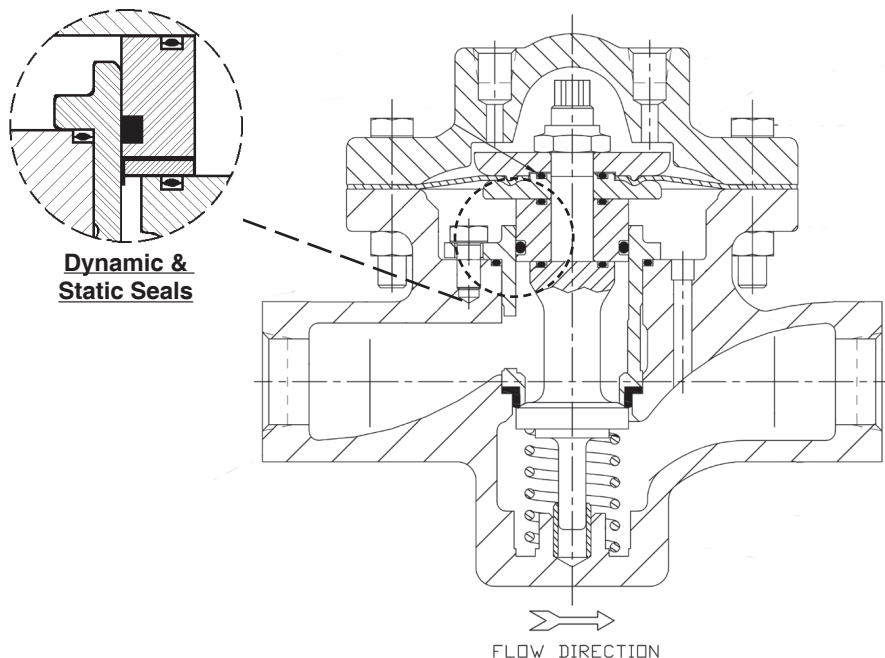

Model PGR-1 Main Body Assembly

OPTION SPECIFICATIONS

OPT-21: COALESCING FILTER. Coalescing filter element removes moisture. Standard construction - filter element removes particulate only.

OPT-25S: RAIN PROOF BUG VENTS. SST material. Size - 1/4" NPT for pilot spring chamber, 1/8" NPT for stabilizer spring chamber. Do not use in applications where gaseous service is hazardous or explosive.

OPT-30: **FLANGED CONNECTIONS.** 1"(DN25) body size with ASME 600# RF flanges. Flange of same general chemistry as body.

NOTES: 1. The body P vs. T ratings are the limiting variables for flanged end conns, unless further restricted by ASME B16.5 or the maximum ratings as established per product design requirements.

OPT-40: **NACE CONSTRUCTION.** Internal wetted portions meet NACE Std. MR0175 for application in sour gas/crude service. Exterior of unit to not be directly buried, insulated, or otherwise denied direct atmospheric exposure. CS/CS, LCC/LCC or SST/SST body/cover dome materials only. 316L SST trim material only. ELG/TFE U-cup dynamic seals. Available in all end connections. The lower spring is constructed of Inconel[†]. SST tubing and fittings.

OPT-55: **SPECIAL CLEANING - GOX.** SST body materials only. Cleaning, assembly and packaging per Cashco Spec #S-1134, making unit suitable for Oxygen Service. **NOTE: Design Pressure Rating shall not exceed 375 psig (25.8 Barg) when body material is SST and process medium is oxygen.**

OPT-56: **SPECIAL CLEANING.** Cleaning per Cashco Spec. No. S-1542 for all body/cover dome materials. Higher cleaning level than std. commercial cleaning. NOT suitable for Oxygen Service.

OPT-85: **PRESSURE TAPS.** Provides second set of inlet and outlet 1/4" (DN8) - FNPT taps with plugs (same basic material as body) on backside of body. Includes second external sensing port tap. See page 10 for details on tap location for both STD. and Opt -85.

OPT-86: **SYSTEM SUPPLY GAUGE.** Glycerin filled pressure gauge. SST case, bourdon tube, socket, and movement. 2 1/2" (64 mm) dial size. Service application temperature range of 30 to +160°F (-1 to +71°C) maximum. Rear case 1/4" (DN8) NPT male connection.

TECHNICAL SPECIFICATIONS

TABLE 1

TABLE 1		
PART	TRIM MATERIALS	
Plug	316L SST	
Guide Bearing	2"-41"WC range	1-200 psig range
	Aluminum	316L SST
Cage	316L SST	
Body Bushing	Monel †	
† See Page 3 for registered trade name information.		

TABLE 2

SEAT, DIAPHRAGM & SEAL TRIM COMBINATIONS								Temp. Rg.	
Set Point Range	Main Valve		Main Valve		Pilot			°F	°C
	Seat	Diaphragm	Static Seal	Dynamic Seal	Ball	Diaphragm			
2"-41"WC	BC	BC	V-TFE	BC O-ring	BC	BC		-35 - +212	-37 - +100
	NBR	NBR	V-TFE	NBR O-ring	NBR	NBR *		-20 - +200	-28 - +93
	NBR	NBR	V-TFE	NBR O-ring	440C SST	NBR *		-40 - +250	-40 - +121
	BC	EPDM	V-TFE	EPDM O-ring	EPDM	EPDM **		-40 - +200	-40 - +93
13"-41" WC	BC	BC	V-TFE	ELG/TFE U-cup	BC	BC		-40 - +212	-40 - +100
	NBR	NBR	V-TFE	ELG/TFE U-cup	NBR	NBR *		-20 - +200	-28 - +93
	V-TFE	NBR	V-TFE	ELG/TFE U-cup	NBR	NBR *		-20 - +250	-28 - +121
1-200 psig	BC	BC	V-TFE	BC O-ring	BC ***	BC		-35 - +212	-37 - +100
	NBR	NBR	V-TFE	NBR O-ring	NBR ***	NBR *		-20 - +200	-28 - +93
	BC	BC	V-TFE	ELG/TFE U-cup	BC ***	BC		-40 - +212	-40 - +100
	NBR	NBR	V-TFE	ELG/TFE U-cup	NBR ***	NBR *		-20 - +200	-28 - +93
	NBR	NBR	V-TFE	ELG/TFE U-cup	440C SST	NBR *		-40 - +250	-40 - +121
	V-TFE	NBR	V-TFE	NBR O-ring	440C SST	NBR *		-40 - +250	-40 - +121
	V-TFE	NBR	V-TFE	ELG/TFE U-cup	440C SST	NBR *		-70 - +250	-57 - +121
	BC	EPDM	V-TFE	EPDM O-ring	EPDM ***	EPDM **		-40 - +200	-40 - +93
1-200 psig Oxygen Ser. Trims	V-TFE	FKM	V-TFE	FKM O-ring	316 SST	FKM *		0 - +400	-17 - +205
	V-TFE	FKM	V-TFE	SST/TFE U-cup	316 SST	FKM *		0 - +400	-17 - +205
	V-TFE	TFE/FKM/TFE	V-TFE	SST/TFE U-cup	316 SST	Expand PTFE *		+100 - +400	+38 - +205
	V-TFE	FK	V-TFE	SST/TFE U-cup	316 SST	Expand PTFE * **		-65 - +350	-54 - +177
* Not recommended for NACE Applications.									
** Not recommended for use in Natural Gas Applications.									
*** For spring range 90 - 200 psig ball material is 316 SST.									

DAG TECHNICAL APPENDIX INDEX

<u>TABLE</u>	<u>TITLE</u>	<u>PAGE</u>
DAG-1A	DI – Press vs Temp vs End Conn Ratings	5
DAG-1C	CS – Press vs Temp vs End Conn Ratings - Design Inlet	6
DAG-1D	Design Outlet	6
DAG-1E.....	SST – Press vs Temp vs End Conn Ratings – Design Inlet	7
DAG-1F.....	Design Outlet.....	7
DAG-5.....	Temperature Limits – Elastomer Mat'ls.....	8
DAG-6.....	Reducer Max Capacity - Plug Wide Open.....	8
DAG-10.....	Inboard Leakage Ratings	8
DAG-11.....	Reducer Recommended Velocity Limits.....	8
DAG-13.....	Max Recommended Noise Limits.....	9
DAG-14.....	Supplement - Chemical Resistance	9
<u>FIGURE</u>		
DAG-F1.....	Dynamic/Static Seals	10
DAG-F2.....	Body/Spring Chamber Taps.....	10

TABLE DAG-1A
DI – DUCTILE IRON
BODY / TOPWORKS MATERIAL SPECIFICATIONS
DESIGN PRESSURE vs. TEMPERATURE vs. END CONNECTION RATINGS
 (To ASME B16.1 for Flanged and B16.4 for NPT Connections per Cast Iron Rating)
 See NOTES 1 & 2

Material Specifications (Body / Topworks)		End Connection – Inlet & Outlet		
Description (Abbr.)	ASTM No.	Temperature °F	Working Pressure – psig	
			End Connection – Pressure Class	
			NPT	125# FF 250# RF
DI/DI (Note 1)	A395/ A395	-20° to +150°	400	200 500
		200°	370	190 460
		225°	355	180 440
		250°	340	175 415
		300°	310	165 375
		350°	300	150 335
		400°	250	140 290
		406°	250	140 290
			400 WOG, 250 S	225 WOG, 125 S 400 WOG, 250 S
		Temperature °C	Working Pressure – Barg	
			End Connection – Pressure Class	
			NPT	125# FF 250# RF
		-29° to +65°	27.6	13.8 34 .5
		107	24.5	12.5 30.2
		120°	23.4	12.1 28.7
		150°	21.2	11.2 25.7
		177°	19.2	10.6 23.8
		204°	17.5	9.6 20.3

NOTE 1: These pressure ratings may be further derated by limitations through the Pressure Equipment Directive (2014/68/EU).

NOTE 2: The maximum inlet pressure of the Pilot in the loading system is 250 psig (17.2 Barg)

Body Material Specifications

Cast Steel A216 Gr. WCB or Steel Weldment A216 Gr. WCB w/ forged flanges A105

Alternate Material: Cast Steel A352 Gr. LCC or Steel Weldment A352 Gr. LCC w/ forged flanges A350 Gr. LF6 Class 2

Topworks Material Specifications

Cast Steel A216 Gr. WCB

Alternate Material: Cast Steel A352 Gr. LCC

DESIGN PRESSURE vs. TEMPERATURE vs. END CONNECTION RATINGS

(Per ASME B16.5 and B16.34) See NOTES 1 & 2

TABLE DAG-1C DESIGN <u>INLET</u> PRESSURE FOR PGR-1 in PSIG (BARG)			
CONSTRUCTION	END CONNECTIONS		
DESIGN TEMP. RANGE: Deg F (Deg C) **	NPT, 600#	150#	300#
-20 to +100 (-29 to +38)	1480 (102.1)	285 (19.6)	740 (51.1)
-20 to +200 (-29 to +93)	1360 (94.2)	260 (17.9)	680 (47.1)
-20 to +300 (-29 to +149)	1310 (90.3)	230 (15.8)	655 (45.1)
-20 to +400 (-29 to +204)	1265 (87.3)	200 (13.7)	635 (43.6)
** Alternate Mat'l: ASTM 352 Gr. LCC Minimum Temperature -50 °F (-46 °C).			

TABLE DAG-1D DESIGN <u>OUTLET</u> PRESSURE FOR PGR-1 in PSIG (BARG)			
CONSTRUCTION	END CONNECTIONS		
DESIGN TEMP. RANGE: Deg F (Deg C) **	NPT, 600#	150#	300#
-20 to +100 (-29 to +38)	750 (51.7)	285 (19.6)	740 (51.1)
-20 to +200 (-29 to +93)	680 (47.1)	260 (17.9)	680 (47.1)
-20 to +300 (-29 to +149)	655 (45.1)	230 (15.8)	655 (45.1)
-20 to +400 (-29 to +204)	635 (43.6)	200 (13.7)	635 (43.8)
** Alternate Mat'l: ASTM 352 Gr. LCC Minimum Temperature -50 °F (-46 °C).			

NOTE 1: These pressure ratings may be further derated by limitations through the Pressure Equipment Directive (2014/68/EU).

NOTE 2: The maximum inlet pressure of the Pilot in the loading system is 250 psig (17.2 Barg)

Body Material Specifications

Cast Stainless Steel A351 Gr.CF3M or Stainless Steel Weldment A315 Gr. CF3M w/ forged flanges A182 Gr. F 316L

Topworks Material Specifications

Cast Stainless Steel A351 Gr.CF3M

DESIGN PRESSURE vs. TEMPERATURE vs END CONNECTION RATINGS (Per ASME B16.5 and B16.34) See NOTES 1 & 2

TABLE DAG-1E DESIGN <u>INLET</u> PRESSURE FOR PGR-1 in PSIG (BARG)			
CONSTRUCTION	END CONNECTIONS		
DESIGN TEMP. RANGE: Deg F (Deg C)	NPT, 600#	150#	300#
-425 to +100 (-254 to +38)	1440 (99.3)	275 (19.0)	720 (49.6)
-20 to +200 (-29 to +93)	1240 (86.1)	235 (16.5)	620 (43.0)
-20 to +300 (-29 to +149)	1120 (77.1)	215 (14.8)	560 (38.6)
-20 to +400 (-29 to +204)	1025 (70.9)	195 (13.6)	515 (35.5)

TABLE DAG-1F DESIGN <u>OUTLET</u> PRESSURE FOR PGR-1 in PSIG (BARG)			
CONSTRUCTION	END CONNECTIONS		
DESIGN TEMP. RANGE: Deg F (Deg C)	NPT, 600#	150#	300#
-425 to +100 (-254 to +38)	625 (43.0)	275 (19.0)	625 (43.0)
-20 to +200 (-29 to +93)	620 (42.3)	235 (16.5)	620 (42.3)
-20 to +300 (-29 to +149)	560 (38.6)	215 (14.8)	560 (38.6)
-20 to +400 (-29 to +204)	515 (35.5)	195 (13.6)	515 (35.5)

NOTE 1: These pressure ratings may be further derated by limitations through the Pressure Equipment Directive (2014/68/EU).

NOTE 2: The maximum inlet pressure of the Pilot in the loading system is 250 psig (17.2 Barg)

**TABLE DAG-5
TEMPERATURE LIMITS
FOR ELASTOMERIC MATERIALS**

Elastomer			T Maximum		T Minimum	
Seats	ID	Description	°F	(°C)	°F	(°C)
	BC	Neoprene	225	(107)	-35	(-37)
	NBR	Buna-N	320	(160)	-40	(-40)
	V-TFE	Virgin TFE	400	(205)	-325	(-198)
Diaphragms	BC	Neoprene (Polychloroprene)	250	(121)	-65	(-53)
	NBR	Buna-N (Nitrile)	250	(121)	-70	(-56)
	EPDM	Ethylene Propylene	300	(148)	-40	(-40)
	FK	Fluorosilicone	350	(177)	-65	(-54)
	FKM	Fluorocarbon Elastomer	400	(205)	0	(-17)
	PTFE	Expanded PTFE	400	(205)	-325	(-198)
	3-Ply	3-Ply (TFE/FKM/TFE)	400	(205)	0	(-17)
Static Seals	V-TFE	Virgin TFE	400	(205)	-325	(-198)
Dynamic Seals	BC	Neoprene O-ring	212	(100)	-35	(-37)
	NBR	NBR O-ring	212	(100)	-40	(-40)
	EPDM	EPDM O-ring	300	(148)	-40	(-40)
	ELG/TFE	Elgiloy / TFE U-cup	400	(205)	-325	(-198)
	FKM	FKM O-ring	400	(205)	-20	(-28)
	SST/TFE	SST / TFE U-cup	400	(205)	-325	(-198)
	BC	NEOP	212	(100)	-40	(-40)
Ball	NBR	BUNA-N	200	(93)	-20	(-28)
	EPDM	EPDM	300	(148)	-55	(-48)

**TABLE DAG-6
REDUCER MAXIMUM CAPACITY
WITH PLUG WIDE-OPEN**

Body Size		Full Port Max Capacity	
in	(DN)	Cv	Kv
1"	(25)	15	13
1-1/2"	(40)	30	26
2"	(50)	60	52
3"	(80)	120	104
4"	(100)	220	190
NOTE: The above Cv factors may be used for sizing of safety relief valves or rupture discs.			

**TABLE DAG-10
INBOARD LEAKAGE RATINGS *
Per ANSI/FCI 70-2**

Seat Material	Dynamic Seal	
	O-Ring	Dynamic Seals Except O-Ring
BC, NBR	VI	IV
V-TFE	IV	IV
*Inboard leak rates are the composite leakage of the seat leakage + dynamic seal leakage, considered as a single inboard leakage value.		

**TABLE DAG-11
REDUCER RECOMMENDED VELOCITY LIMITS**

Application Fluid	Valve		Valve Body Outlet		Downstream Pipe		Units
	Type	Size Range					
			Recommend	Max.	Recommend	Max.	
Gas	PRV	1"	0.20	0.40	0.15	0.30	Mach #
		1-1/2"—2"	0.25	0.45	0.20	0.30	
		3"—4"	0.30	0.50	0.25	0.35	
NOTE: On gas service, a pilot operated PRV can work with a Regulator body outlet Mach = 0.75.							

TABLE DAG 13
MAXIMUM RECOMMENDED NOISE LIMITS *

Criteria	Body Sizes		Noise Level - dBA
	in	(DN)	
Per OSHA Regs. w/noise attenuation methods incorporated.	All	All	85-95
Sch. 80 pipe, no insulation.	1" – 2"	(25-50)	95
Std. wt. pipe, no insulation.	3" – 4"	(80-100)	98

* Consult Factory for ALL applications exceeding 97 dBA noise prediction.

Schemes To Reduce High Noise –


- Staging – using two separate throttling valves in series.
- dB Plates – using 1, 2 or 3-stage dB Plate cartridges downstream of a throttling valve.
- Paralleling – using two separate throttling valves in parallel.
- Combinations – using multiple methods of above three possibilities.

DAG-14 SUPPLEMENT
CHEMICAL RESISTANCE


General Statement: Statements located within this technical bulletin concerning suitability of fluids with TFE materials are general statements, and should not be construed as recommendations. Any statements of suitability are the result of a compilation of various sources of information based on experience, tests, and published technical literature. No guarantee or warranty is in anyway implied for a given particular service or application.

Additional Reference: For an inclusive listing covering a broader range of service application fluids, reference "Handbook of Corrosion Resistant Piping", P.A. Schweitzer, Industrial Press, or "Compass Corrosion Guide", 2nd Edition, K.M. Pruett, Compass Publications. This publication will include information based on the following fluid variables:

1. Solution concentration
2. Pressure
3. Temperature

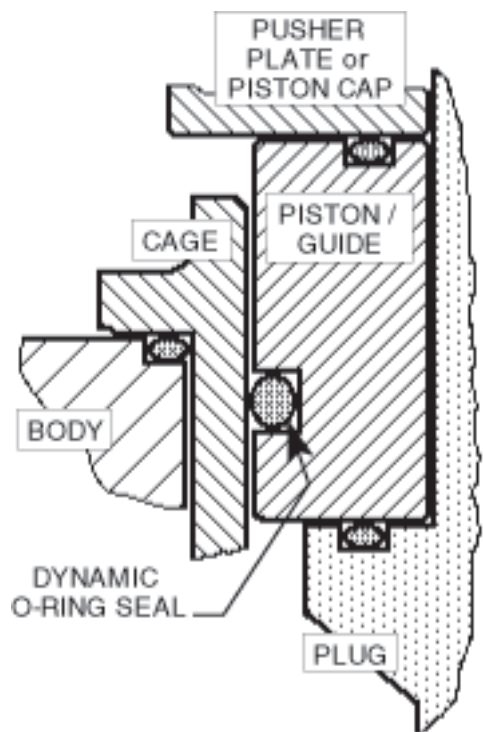


O-RING DYNAMIC SEAL

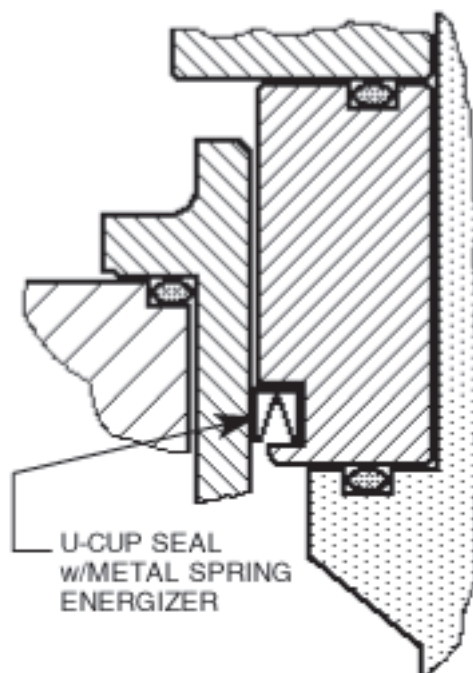


U-CUP DYNAMIC SEAL

FIGURE DAG-F2
Location of BODY TAPS


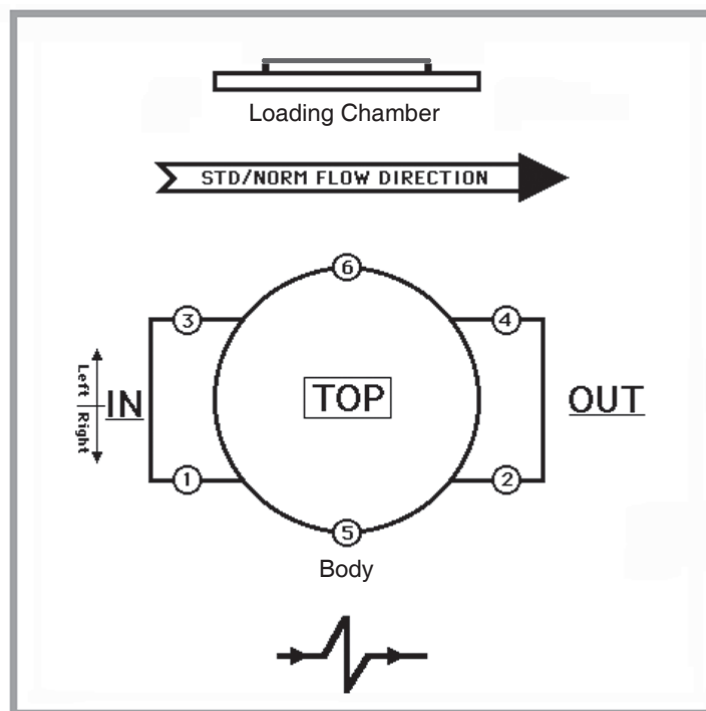


Location	Description	Opt. No.	NPT - Size
1 & 2	Inlet & Outlet – Right	STD	1/4"
5	External Sensing – Right	STD	1/4"
1, 2, 3 & 4	Inlet & Outlet – Right Inlet & Outlet – Left	85	1/4"
5 & 6	Double External Sensing	85	1/4"

DIMENSION and WEIGHTS

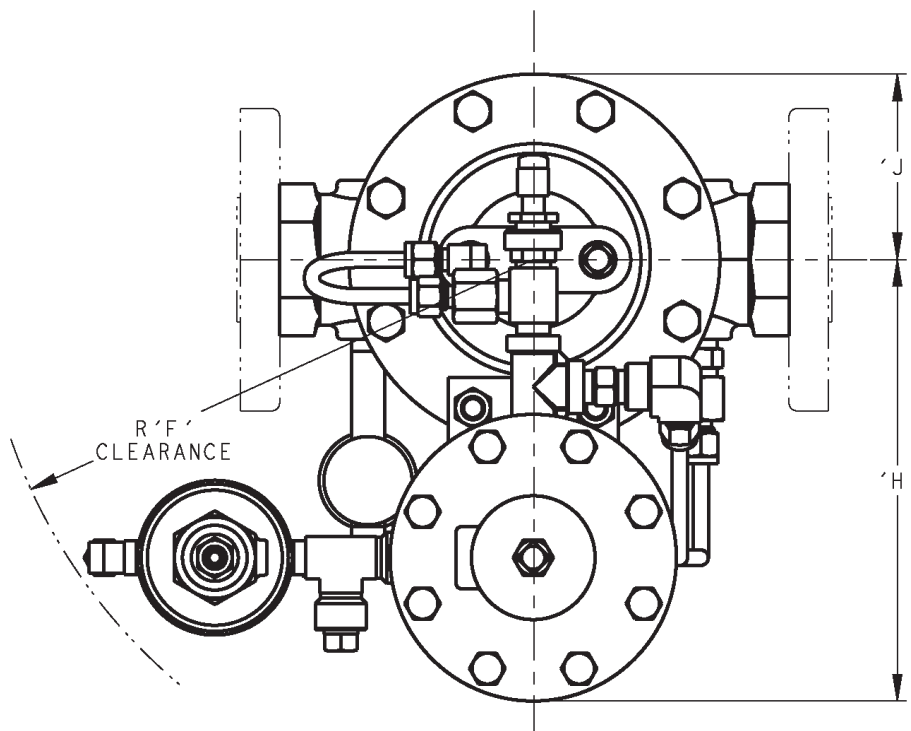

DIMENSION and WEIGHTS

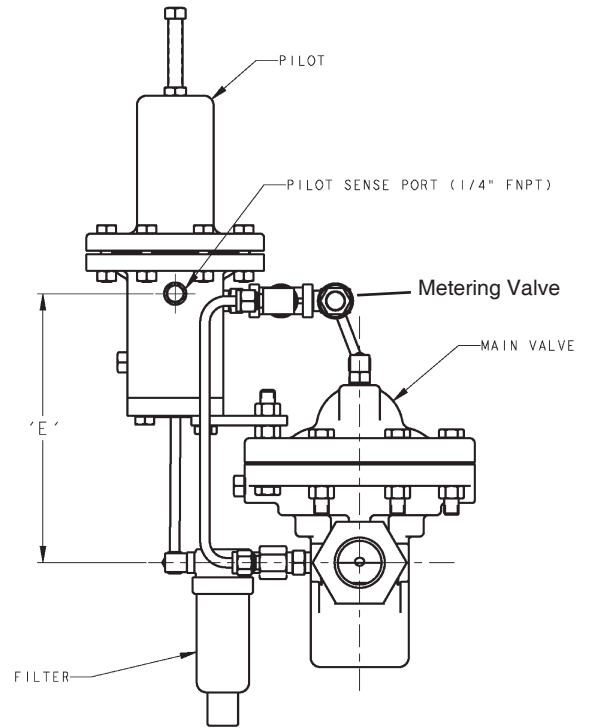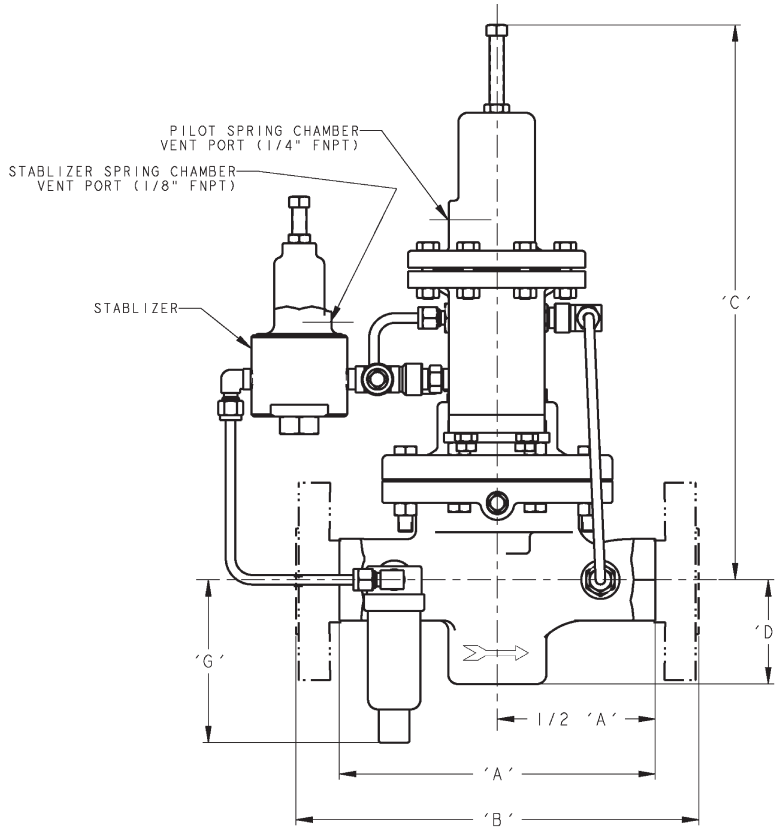

ENGLISH UNITS (in) (lbs)

DIMEN.	END CONN.	BODY MAT'L	BODY SIZE				
			1"	1-1/2"	2"	3"	4"
A	NPT	DI	6.00	9.88	9.88	—	—
		CS, SST	8.25	9.88	9.75	—	—
B	125# FF	DI	—	—	—	11.75	13.88
	250# RF	DI	—	—	—	12.50	14.50
	150# RF	CS, SST	10.75	12.38	10.00	11.75	13.88
	300# RF	CS, SST	10.75	12.38	10.50	12.50	14.50
	600# RF	CS, SST	10.75	12.38	11.25	13.25	15.50
C	ALL	ALL	16.50	16.75	17.00	19.50	19.50
D	ALL	ALL	2.84	3.69	4.00	5.75	7.00
E	ALL	ALL	7.00	7.50	8.00	10.50	10.50
F	ALL	ALL	10.00	10.00	11.00	11.00	11.00
G	ALL	ALL	4.25	4.25	4.25	—	—
H	ALL	ALL	4.75	5.25	8.25	9.50	9.50
J	ALL	ALL	3.00	3.50	4.00	5.50	5.50
WEIGHT	wo/ Flanges	ALL	46	50	71	—	—
	w/ Flanges	ALL	51	55	84	178	187

METRIC UNITS (mm) (kg)

DIMEN.	END CONN.	BODY MAT'L	BODY SIZE				
			DN25	DN40	DN50	DN80	DN100
A	NPT	DI	152	251	251	—	—
		CS, SST	209	251	248	—	—
B	125# FF	DI	—	—	—	298	352
	250# RF	DI	—	—	—	318	368
	150# RF	CS, SST	273	314	254	298	352
	300# RF	CS, SST	273	314	267	318	368
	600# RF	CS, SST	273	314	286	336	394
C	ALL	ALL	419	425	432	495	495
D	ALL	ALL	72	94	102	146	178
E	ALL	ALL	178	191	203	267	267
F	ALL	ALL	254	254	279	279	279
G	ALL	ALL	108	108	108	—	—
H	ALL	ALL	122	132	210	241	241
J	ALL	ALL	76	89	101	140	140
WEIGHT	wo/ Flanges	ALL	21	22	32	—	—
	w/ Flanges	ALL	23	25	38	81	85

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. We reserve the right to modify or improve the designs or specifications of such product at any time without notice. Cashco does not assume responsibility for the selection, use or maintenance of any product. Responsibility for proper selection, use and maintenance of any Cashco product remains solely with the purchaser.

MODEL PGR-1 PRODUCT CODER 02/07/20

An "X" in POS 12 followed by a 5-digit control number overrides remaining selections.

PG	POS 3	—	POS 5	POS 6 & 7	7	—	POS 10	POS 11	POS 12	POS 13	POS 14	POS 15	POS 16	0	A
-----------	----------	---	----------	--------------	----------	---	-----------	-----------	-----------	-----------	-----------	-----------	-----------	----------	----------

POSITION 3 - SIZES		
Size	STD	
in	(DN)	CODE
1"	(25)	6
1-1/2"	(40)	8
2"	(50)	9
3"	(80)	B
4"	(100)	C

POSITION 5 - BODY/COVER DOME MATERIALS			
Materials	CODE	Materials	CODE
DI/DI	1	LCC/LCC	6
CS/CS	5	SST/SST	A

POSITION 6 & 7 - SEAT & DIAPHRAGM MATERIALS							
Set Point Range	Main Valve		Main Valve		Pilot		CODE
	Seat	Diaphragm	Static Seal	Dynamic Seal	Ball	Diaphragm	
2"-41"WC	BC	BC	V-TFE	BC O-ring	BC	BC	S1 *
	NBR	NBR	V-TFE	NBR O-ring	NBR	NBR	S2
	NBR	NBR	V-TFE	NBR O-ring	440C SST	NBR	S3
	BC	EPDM	V-TFE	EPDM O-ring	EPDM	EPDM	S4 **
13-41"WC	BC	BC	V-TFE	ELG/TFE U-cup	BC	BC	SJ *
	NBR	NBR	V-TFE	ELG/TFE U-cup	NBR	NBR	SK
	V-TFE	NBR	V-TFE	ELG/TFE U-cup	NBR	NBR	SL
	BC	BC	V-TFE	BC O-ring	BC ***	BC	SA *
1-200 psig	NBR	NBR	V-TFE	NBR O-ring	NBR ***	NBR	SB
	BC	BC	V-TFE	ELG/TFE U-cup	BC ***	BC	SC *
	NBR	NBR	V-TFE	ELG/TFE U-cup	NBR ***	NBR	SD
	NBR	NBR	V-TFE	ELG/TFE U-cup	440C SST	NBR	SE
	V-TFE	NBR	V-TFE	NBR O-ring	440C SST	NBR	SF
	V-TFE	NBR	V-TFE	ELG/TFE U-cup	440C SST	NBR	SG
	BC	EPDM	V-TFE	EPDM O-ring	EPDM ***	EPDM	SH **
	V-TFE	FKM	V-TFE	FKM O-ring	316 SST	FKM	SM
1-200 psig Oxygen Ser. Trims	V-TFE	FKM	V-TFE	SST/TFE U-cup	316 SST	FKM	SN
	V-TFE	TFE/FKM/TFE	V-TFE	SST/TFE U-cup	316 SST	Expand PTFE	SP
	V-TFE	FK	V-TFE	SST/TFE U-cup	316 SST	Expand PTFE	SR **

* Suitable for NACE Applications.

** Not recommended for use in Natural Gas Applications.

*** For spring range 90 - 200 psig ball material is 316 SST.

Abbreviations defined on page 2.

POSITION 10 - END CONNECTIONS / ASME							
Size	Material	End Conn	CODE	End Conn	CODE	End Conn	CODE
1" - 2"	ALL	NPT	1	—	—	—	—
3" - 4"	DI	125#FF	2	250#RF	3	—	—
1" - 4"	CS / SST	150#RF	4	300#RF	5	600#RF	8

POSITION 14 - SPRING CHAMBER OPTIONS		
Description	Option	CODE
No Option	—	0
SST Rain proof Bug Vent.	-25S	H

POSITION 11 - PILOT SPRING RANGE			
Set Point Range	NON-NACE	NACE	
in WC	mbarg	CODE	CODE
2"-41"WC *	4.9-101	1	G
13"-41"WC	32-101	2	H
psig	barg		
1-5	.07-.34	3	J
3-10	.20-.68	4	K
7-20	.48-1.3	5	L
15-50	1.0-3.4	6	M
40-100	2.7-6.8	7	N
90-200	6.2-13.7	8	P

* Spring Range for 2" - 41"WC not available for Trims SJ, SK, SL..

POSITION 12 - TUBING		
Material	External Sensing *	Self Contained Sensing
	CODE	
Brass	B	C
Stainless Steel **	S	T
For Special Construction Contact Cashco for Special Code	X	

* Standard - (see page 2)

** Use with Opt-40

POSITION 15 - BODY OPTIONS		
Description	Option	CODE
No Option	—	0
Second Set 1/4" (DN8) FNPT Pressure Taps & Plugs.	-85	T

POSITION 16 - CERTIFICATE OPTIONS		
Description	Option	CODE
No Option	—	0
NACE CONST: CS/CS, LCC/LCC or SST/SST.Per MR0175	-40	J
SPECIAL CLEANING: Per Spec #S-1134. W/ properly selected mat'ls. Suitable for Oxygen Service. SST body material.	-55	M
Special Cleaning: Per Cashco Spec #S-1542.	-56	N

POSITION 13 - FEATURE OPTIONS		
Description	Option	CODE
No Option	—	0
Coalescing Filter element.	-21	C
System Supply Gauge for Outlet of Stabilizer.	-86	U

*** For information on ATEX see pages 17 & 18 on the IOM.**

Cashco
P.O. Box 6
Ellsworth, KS 67439-0006
PH (785) 472-4461
FAX (785) 472-3539
www.cashco.com
e-mail: sales@cashco.com
Printed in U.S.A. PGR-1-TB

Cashco GmbH
Handwerkerstrasse 15
15366 Hoppegarten, Germany
PH +49 3342 30968 0
Fax. No. +49 3342 30968 29
www.cashco.com
email: germany@cashco.com

Cashco do Brasil, Ltda.
Al.Venus, 340
Indaiatuba - Sao Paulo, Brazil
PH +55 11 99677 7177
Fax. No.
www.cashco.com
email: brazil@cashco.com